



## Aluminium MultiFolding Doors

### Design Features:


- Internally beaded with a softline detail to all external doors and panels
- Chamfered and square bead options
- Stainless steel wheels ensure smooth and consistent operation
- Unique, flush line pop-out handle that allows maximum door opening
- Low threshold option (DDA and Part M compliant) – no weather rating
- Doors and panels can be used in any configuration, style and design
- Magnetic catch for prime/slave leaf
- All configurations are available in both open-in and open-out options
- Full range of suited hardware available
- Glazing range from 28mm to 36mm sealed units
- Available in any single or dual RAL colour option
- High security hinges and locking mechanisms as standard
- Shootbolts top and bottom of the interlocks for enhanced security
- Four stainless steel wheels design for increased weight capacity
- Bottom wheel guide for consistent operation and increased security
- Double track threshold allowing greater stability
- Thermally broken aluminium sections
- Door U Value 1.7 w/m<sup>2</sup> K with double glazing



Flush line pop-out handle



Stainless steel wheels

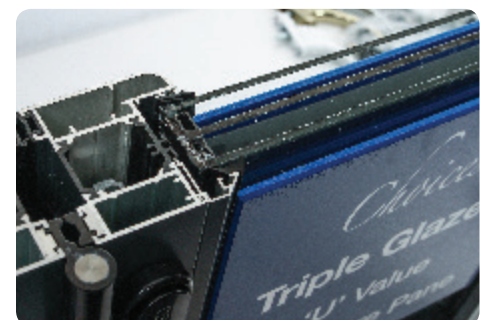


Triple Glazing upgrade available (door 'U' Value 1.5)



# Aluminium MultiFolding Doors

## Configuration

Available in a range of styles and designs, panels can be stacked inside or outside of the room, to the left, right or split to stack on both sides. Door sets can be manufactured to replace entire walls to maximise your opening space.

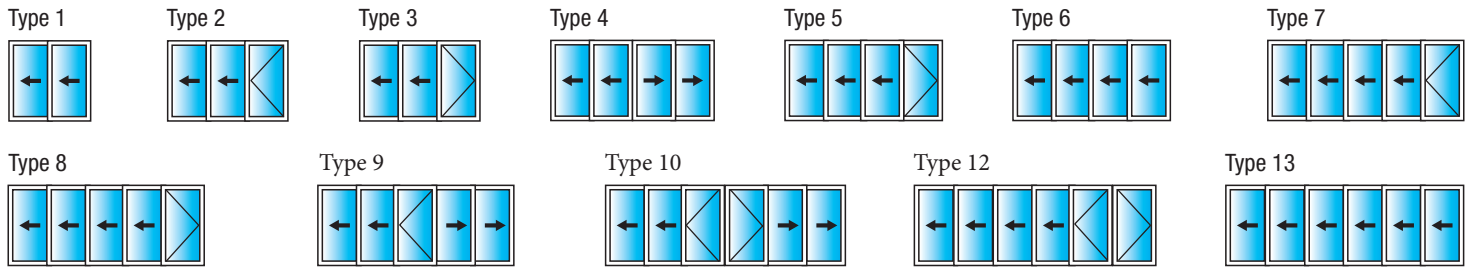

### Sizing

Minimum Height - 1600mm

Maximum Height - 2600mm\*\*

Minimum Width - 1400mm

Maximum Width - 6500mm\*\*

\*\*The sizes detailed above are for guidance only Contact us for further details

Maximum Sash Weight - 100kgs

Individual panel width not to exceed 1000mm

Glazing - 28mm Planitherm, Black warm edge spacer, argon filled units.

All configurations have lever/lever handles on the prime leaf with the exception of types 1, 4, 6 and 13 which are internal handles only.

“ First aluminium folding door to achieve Secured by Design status in the UK ”

Contact us for costings on Secured by Design upgrade

### Standard Colour Range Powder coated both sides



White  
RAL 9910hg



Black  
RAL 9005m



Anthracite Grey  
RAL 7016m

Full range of Single and Dual RAL colours available



Cornerless Aluminium MultiFolding Door - Two Doors, One Aperture and No Corner Post!



Supplied with magnetic stacking catches where required



22 Oswald Road, Fetcham, Surrey, KT22 9TZ

Phone: 01372 802300

Mobile: +44 (0)7776 154234

Email: info@tpimprovements.co.uk

The Choices brand